

741 SERIES SINGLE-FUNCTION TIMERS



The next generation of timing systems is here. The 741 Series Single-Function Timers are designed to be easier to use, give you more flexibility and ensure utmost accuracy.

Ideal for many kitchen applications, including monitoring frying, grilling and prep stations, and tracking coffee-making and employee handwashing. Quite simply, if a kitchen task needs to be timed or monitored, Prince Castle timers can help manage these tasks.

These simple-to-use timers countdown in hours and minutes, or minutes and seconds. Up and down scan buttons make each channel easy to program. Each channel is activated with a push of a button. A digital channel display shows the active channel.

LED channel indicators change colors during the timing cycle depending on the stage of the countdown: the light is green during the first 70% of the cycle, then turns yellow during the next 20% of the cycle, and finally turns red during the last 10% of the cycle. A dual tone volume alarm and flashing channel indicator alert the operator when timing is complete.


FEATURES

- Digital channel display shows the active channel.
- New multi-colored LED channel indicators show the status of the timing cycle and provide early warning as the countdown expires.
- Lightweight ultra-slim 2.5 inch (6.4 cm) thick design and 6 foot (1.8 m) line cord allow these units to be mounted virtually anywhere.
- Each channel can be programmed independently, and all channels can be used simultaneously.
- The two-tone alarm is adjustable for either high or low sound levels.
- Includes menu labels to identify channels: Burgers, Steak, Chicken, Fish, Fries and blank stickers.
- Includes set of 3-1/2 inch (8.9 cm) mounting brackets. For increased mounting flexibility, flush mount brackets are available.
- One year warranty.
- Timers operate on any voltage worldwide.

ORDERING INFORMATION

All timers are equipped with an I.E.C. connector. The appropriate I.E.C. cord set is also included to meet the electrical requirements for specific countries.

CERTIFICATIONS

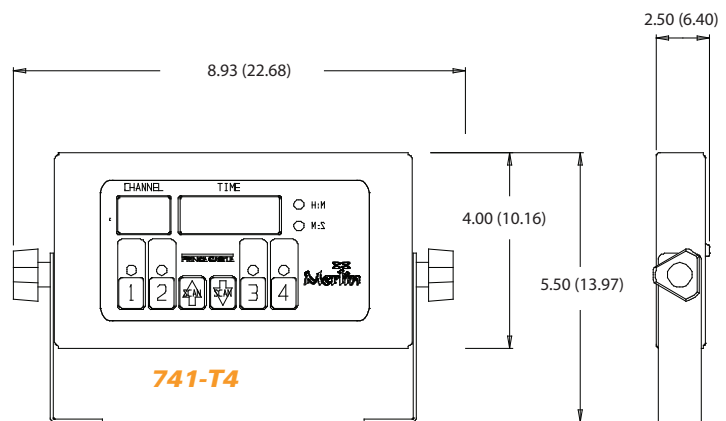

DIMENSIONS

Model Number	Width in(cm)	Height in(cm)	Depth in(cm)	Shipping Weight lb(kg)	Shipping cu.ft (cu.m)
741-T4	8.93 (22.68)	4.00 (10.16)	2.50 (6.40)	4.00 (1.80)	.30 (.01)
741-T12	12.93 (32.84)	4.00 (10.16)	2.50 (6.40)	5.00 (2.30)	.32 (.01)

ELECTRICAL INFORMATION

Model Number	Description	Volts	Hz	Watts	Amps
741-T4	4-Channel Single-Function Timer	100-240	50/60	10 max	.083 max
741-T12	12-Channel Single-Function Timer	100-240	50/60	10 max	.083 max

Designs and Specifications are subject to change without notice.